




Dumper 800 2 RM

SCARICO IDRAULICO FRONTALE /CON PALA /AUTOCARICANTE/TRILATERALE
 DESCARGEMENT HYDRAULIQUE FRONTAL /AVEC PELLE CHARGEUSE
 TRILATERAL HYDRAULIC FRONTAL TIPPING /WITH SHOVEL/THREE SIDES DISCHARGE
 DESCARGA HIDRAULICA FRONTAL /CON PALA/TRILATERAL

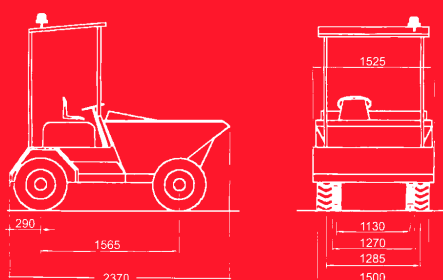

CARATTERISTICHE TECNICHE DONNEES TECHNIQUES SPECIFICATIONS CARACTERISTICAS TECNICAS		Dumper 800 2 RM	
CAPACITA' DELLA BENNA - CAPACITE' DE LA BENNE - SKIP CAPACITIES - CAPACIDAD DE LA TOLVA			
A RAS A RAS STRUCK NIVEL DE AGUA	800 ltr.	A COLMO COMBLEE HEAPED COLMADA	1.200 ltr.
PORTATA PORTEE MAX PAYLOAD CARGA UTIL			1.500 Kg
PESO A VUOTO POIDS A VIDE UNLOADED WEIGHT PESO EN VACIO			1.250 Kg
MOTORE DIESEL MOTEUR DIESEL DIESEL ENGINE MOTOR DIESEL	HATZ AVV. ELETTRICO HATZ DEMARRAGE ELECTRIQUE HATZ ELECTRIC START HATZ ARRANQUE ELECTRICO	1D81	
POTENZA PUISSANCE POWER POTENCIA MOTOR			HP 14,3
Nr. CILINDRI Nr. CYLINDRES Nr. CYLINDERS Nr. CILINDROS			1
TRASMISSIONE TRANSMISSION MECHANICAL TRANSMISION	MECCANICA MECANIQUE TRANSMISSION MECANICA MEDIANTE CARDAN		
MARCE AVANTI / RETRO VITESSE AV/AR FORWARD / REVERSE GEARS VELOCIDADES ADELANTE / ATRAS			4/4
FRIZIONE MONODISCO A SECCO EMBAYAGE MONODISQUE A SEC SINGLE DRY PLATE CLUTCH EMBRAGUE MONODISCO EN SECO			
VELOCITA' MAX VITESSE MAX MAX SPEED VELOCIDAD MAX			22 Km/h
FRENI FREINS BRAKES FRENOS	IDRAULICI SULLE 2 RUOTE HYDRAULIQUES SUR LES 2 ROUES 2 WHEELS HYDRAULIC FOOTBRAKES HIDRAULICOS SOBRE LAS 2 RUEDAS		
RUOTE MOTRICI ROUES MOTRICES WHEELS DRIVE RUEDAS MOTRICES			2
PNEUMATICI AVANTI/DIETRO PNEUS AVANT/DERRIERE TYRES FRONT/REAR NEUMATICOS DELANTE/ATRAS	7.50 - 16 / 165 -70 R 14		

SILLA Macchine Edili e Stradali S.r.l.

53036 POGGIBONSI (SI) ITALY - Via San Gimignano, 96

Tel. +39.0577.938.051 - Fax +39.0577.981.609

e-mail: info@sillaitaly.com - www.sillaitaly.com