




Dumper 1200 NT/SN

SCARICO IDRAULICO FRONTALE
DESCHARGEMENT HYDRAULIQUE FRONTAL
HYDRAULIC FRONTAL TIPPING
DESCARGA HIDRAULICA FRONTAL

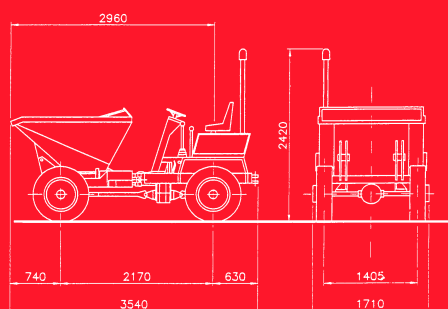

CARATTERISTICHE TECNICHE DONNEES TECHNIQUES SPECIFICATIONS CARACTERISTICAS TECNICAS		Dumper 1200 NT/SN	
CAPACITA' DELLA BENNA - CAPACITE' DE LA BENNE - SKIP CAPACITIES - CAPACIDAD DE LA TOLVA			
A NIVEL DE AGUA A RAS STRUCK NIVEL DE AGUA	1.200 ltr.	A COLMO COMBLEE HEAPED COLMADA	1.500 ltr.
PORTATA PORTEE MAX PAYLOAD CARGA UTIL	3.000 Kg		
PESO A VUOTO POIDS A VIDE UNLOADED WEIGHT PESO EN VACIO	1.500 Kg		
MOTORE DIESEL LOMBARDINI / HATZ AVV. ELETTRICO MOTEUR DIESEL LOMBARDINI / HATZ DEMARRAGE ELECTRIQUE DIESEL ENGINE LOMBARDINI / HATZ ELECTRIC START MOTOR DIESEL LOMBARDINI / HATZ ARRANQUE ELECTRICO	9LD 625.22 / 2G40		
POTENZA PUISSANCE POWER POTENCIA MOTOR	HP 28,5/HP 23		
Nr. CILINDRI Nr. CYLINDRES Nr. CYLINDERS Nr. CILINDROS	2		
TRASMISSIONE TRANSMISSION MECHANICAL TRANSMISION	MECCANICA MECANIQUE TRANSMISSION MECANICA MEDIANTE CARDAN		
MARCE AVANTI / RETRO VITESSE AV/AR FORWARD / REVERSE GEARS VELOCIDADES ADELANTE / ATRAS	4/4		
FRIZIONE MONODISCO A SECCO EMBAYAGE MONODISQUE A SEC SINGLE DRY PLATE CLUTCH EMBRAGUE MONODISCO EN SECO			
VELOCITA' MAX VITESSE MAX MAX SPEED VELOCIDAD MAX	25 Km/h		
FRENI FREINS BRAKES FRENOS	IDRAULICI SULLE 4 RUOTE HYDRAULIQUES SUR LES 4 ROUES 4 WHEELS HYDRAULIC FOOTBRAKES HIDRAULICOS SOBRE LAS 4 RUEDAS		
RUOTE MOTRICI ROUES MOTRICES WHEELS DRIVE RUEDAS MOTRICES	4		
PNEUMATICI PNEUS TYRES NEUMATICOS	10.0 / 75 - 15,3		

SILLA Macchine Edili e Stradali S.r.l.

53036 POGGIBONSI (SI) ITALY - Via San Gimignano, 96

Tel. +39.0577.938.051 - Fax +39.0577.981.609

e-mail: info@sillaitaly.com - www.sillaitaly.com